

# Pacific Fans Ltd

## ROOF UNITS




Roof Units (Horizontal-Extract or Supply Air) are available in 4 models - 300 & 500 (4 pole), 560 & 630 (6 pole)

Cowls and Bases are constructed of fibreglass giving strength and durability, yet relatively lightweight.

Motors used in these axial units are totally enclosed Airstream rated with IP44 protection and Class F insulation. The standard motor is wound for 230 volt, 1-phase, 50Hz supply but 400 volt, 3-phase are available on request.


### PERFORMANCE CURVES

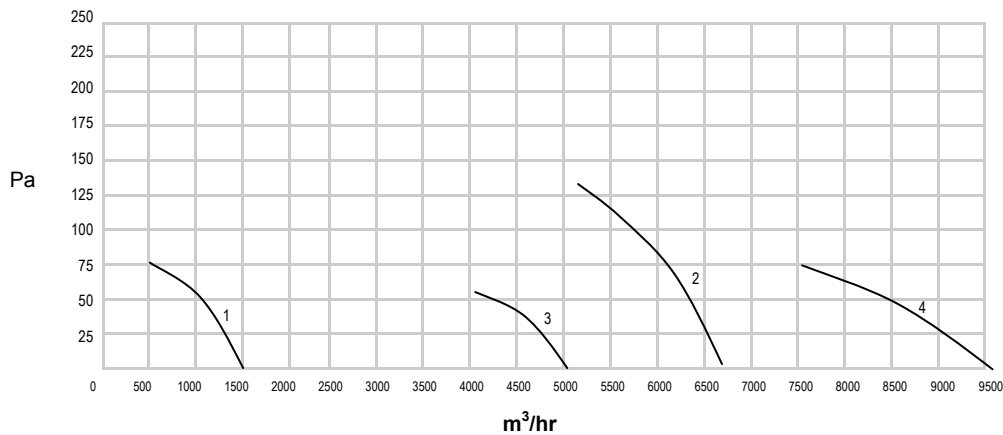

### TECHNICAL DATA

Ref	Model	Diam, mm	Speed	Voltage	Hz	m³/hr	Watts	Current	Noise
1	RH300-4-1	300	1320	230	50/60	1500	95	0.45A	62
2	RH500-4-1	500	1320	230	50/60	6500	420	2.0A	76
3	RH560-6-1	560	920	230	50/60	4500	270	1.25A	68
4	RH630-6-1	630	920	230	50/60	9000	400	1.8A	76

### DIMENSIONS

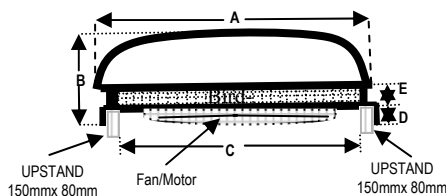

Ref	A mm	B mm	C mm	D mm	E mm	Upstand mm	Wght kgs
1	500	300	400	60	75	150 x 80	15
2	770	410	590	75	100	150 x 80	30
3	1180	580	845	100	200	150 x 80	40
4	1180	580	845	100	200	150 x 80	45

