

# Pacific Fans Ltd

## SHOWER VENT




A "Shower Vent" system is the answer to complete ventilation of Bathroom and Toilet areas. The system is effective particularly in ablution areas of Apartments and Hotels but can also be used to clear steam and other "nasties" from toilets and bathrooms in private homes.

A high pressure centrifugal fan (totally sealed) is used to provide an efficient extract system. The "Shower Vent" has been designed for use with standard plumbing fittings which greatly reduces installation costs in restricted areas.

Airflow of 55 L/sec (200 m<sup>3</sup>/hr) offers the option of ventilation of two areas with one unit, thereby, offering extremely economical ventilation of ablution areas.

### PERFORMANCE CURVES

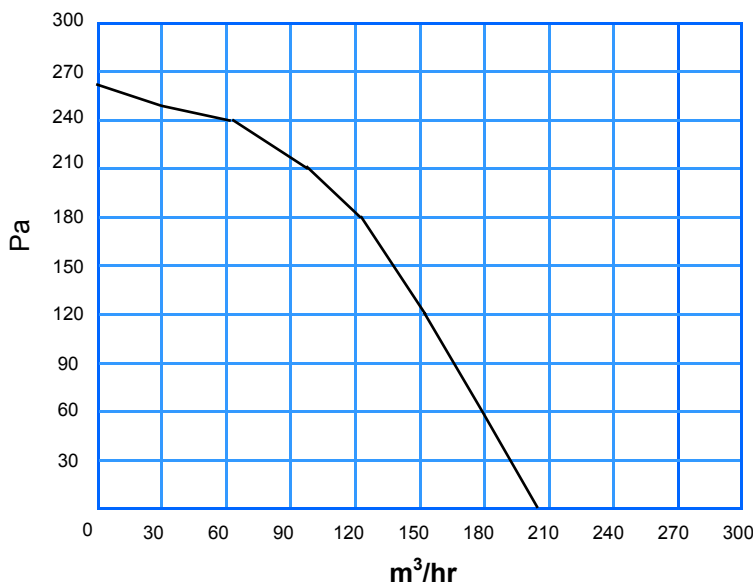

### TECHNICAL DATA

Model	Diam, mm	Speed RPM	V	Hz	m <sup>3</sup> /hr	Watts	Amps	Noise dBA
SV120	120	2350	230	50/60	200	80W	0.35A	50

### DIMENSIONS

Long	Wide	Deep
265	227	135

### ANCILLARY EQUIPMENT



Ceiling Diffuser fitted to Box 90°



Transformation 60 mm / 100 mm



Wall Grille 100 mm



Ceiling Diffuser 100 mm or 150 mm



Flexible Ducting

PO Box 302-159, North Harbour, Auckland, New Zealand  
 Office/Warehouse: 22 Tarndale Grove, Albany 1331, New Zealand  
 Tel: +64 9 415 1326 · Fax+64 9 415 1328 · Email: [pacific.fans@xtra.co.nz](mailto:pacific.fans@xtra.co.nz)  
[www.pacificfans.co.nz](http://www.pacificfans.co.nz)