



Pacific Fans Ltd

ROOF UNITS



Low Profile Roof Unit (Horizontal-Extract or Supply Air) are available in 7 models—300 to 500 (4 pole) and 560 & 630 (6 pole)

Cowls and Bases are constructed of fibreglass (white) giving strength and durability, yet relatively lightweight.


Motors used in these axial units are totally enclosed Airstream rated with IP44 protection and Class F insulation. The standard motor is wound for 230V, 1-phase, 50Hz supply.

TECHNICAL DATA

Ref	Model	Diam, mm	Speed rpm	Voltage V	Hz	m ³ /hr	Watts W	Current Amps	Noise dB(A)	Base □
1	RH300-4-1	300	1320	230	50/60	1330	80	0.40	50	510
2	RH350-4-1	350	1320	230	50/60	1440	130	0.58	52	510
3	RH400-4-1	400	1380	230	50/60	2700	180	0.80	58	610
4	RH450-4-1	450	1380	230	50/60	4500	250	1.20	62	610
5	RH500-4-1	500	1380	230	50/60	7000	570	2.50	66	1050
6	RH560-6-1	560	920	230	50/60	5000	270	1.25	58	1050
7	RH630-6-1	630	920	230	50/60	9500	400	1.80	66	1050

DIMENSIONS

Ref	Model	A mm	B mm	C mm	D mm	E mm	Upstand mm	Base mm	Wght kgs
1	RH300-4-1	600	400	500	75	75	150 x 50	510	15
2	RH350-4-1	600	400	500	75	75	150 x 50	510	15
3	RH400-4-1	700	500	600	80	100	150 x 50	610	20
4	RH450-4-1	700	500	600	80	100	150 x 50	610	20
5	RH500-4-1	1180	580	1040	100	200	150 x 50	1050	30
6	RH560-6-1	1180	580	1040	100	200	150 x 50	1050	40
7	RH630-6-1	1180	580	1040	100	200	150 x 50	1050	45

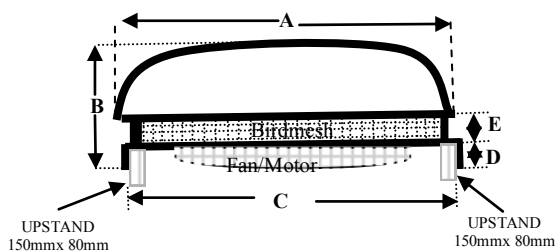

PO Box 302-159, North Harbour, Auckland 0751, New Zealand
 Office/Warehouse: 22 Tarnedale Grove, Albany, Auckland 0632, New Zealand
 Tel: +64 9 415 1326 · Fax+64 9 415 1328 · Email: pacific.fans@xtra.co.nz
www.pacificfans.co.nz